

Section 10 BODY/FRAME


Subsection 02 (BODY)

FOOTPEG

Removal

Remove:

- footpeg bolts no. 12

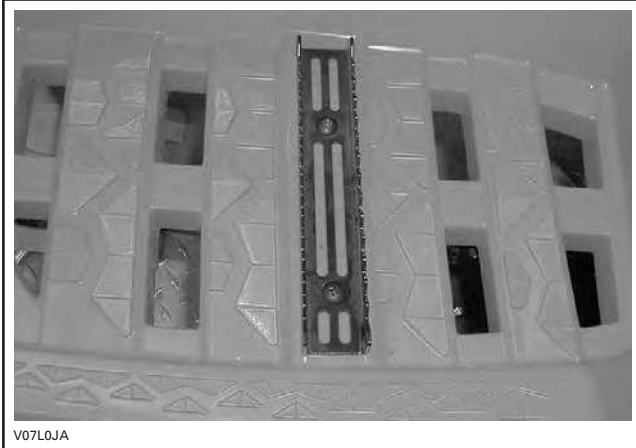

- footpeg no. 13.

Installation

The installation is the reverse of removal procedure.

FOOTWELL

Removal

Remove:

- side panel no. 8 or no. 9
- footpeg no. 13
- all screws no. 14 retaining the footwell no. 15 or no. 16 to fenders.



Pull the footwell out of vehicle.


Installation

The installation is the reverse of removal procedure.

CONSOLE


Removal

Remove screws no. 17 retaining console no. 18.

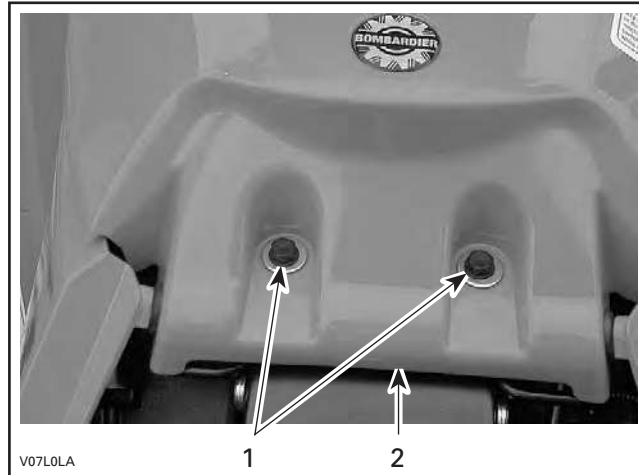

1. Console screws
2. Console

Remove plastic rivets no. 1 near handlebar cover.

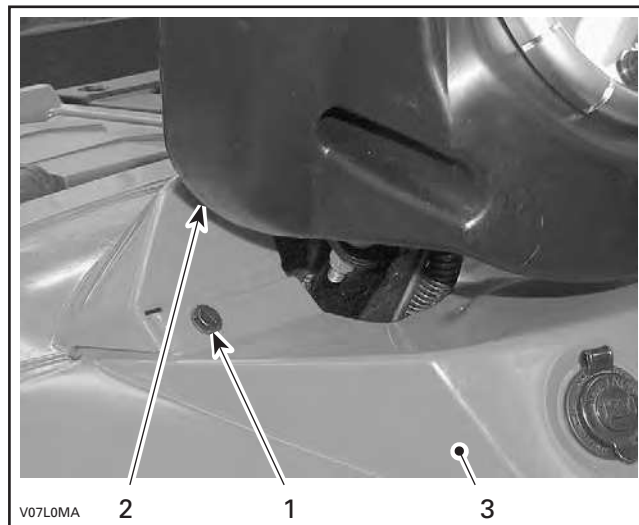

1. Plastic rivets
2. Handlebar cover
3. Console

Lift the console then unplug the ignition switch and the 12-volt power outlet.

Remove the console.

Installation

The installation is the reverse of removal procedure.